

Professional high-speed optical transceiver

OPN-SFD41-80LC2 / OPN-SFD41-80LC2I

622Mbps / 80km / 100GHz DWDM Digital Diagnostic LC SFP SINGLE-MODE TRANSCEIVER

PRODUCT FEATURES

- Hot-Pluggable SFP Footprint LC Optical Transceiver
- Small Form-Factor Pluggable (SFP) MSA compatible
- Compliant with SONET OC-12 / SDH STM-4 (L-4.2)
 - Distance up to 80km
- Temperature-stabilized DWDM DML Transmitter
 - 29 dB Power Budget at Least
 - 100 GHz ITU Grid, C Band
- SFF-8472 Digital Diagnostic Function
- AC/AC Coupling according to MSA
 - Single +3.3 V Power Supply
 - RoHS Compliant
- 0 to 70°C Operation: OPN-SFD41-80LC2
- -50 to 85°C Operation : OPN-SFD41-80LC2I
- Class 1 Laser International Safety Standard IEC-60825Compliant

APPLICATIONS

- ATM Switches and Routers
- SONET / SDH Switch Infrastructure
 - XDSL Applications
 - Metro Edge Switching
- CPRI option 1: 614.4 Mbit/s

PRODUCT DESCRIPTION

The OPN-SFD41-80LC2I series single mode transceiver is a small form factor pluggable module for bi-directional serial optical data communications such as SONET OC-12 / SDH STM-4 and Fast Ethernet. It is with the SFP 20-pin connector to allow hot plug capability. Digital diagnostic functions are available via an I²C. This module is designed for single mode fiber and operates at a nominal wavelength of 100GHz ITU Grid, C Band DWDM wavelength. A guaranteed minimum optical link budget of 29 dB is offered. The transmitter section uses temperature-stabilized DWDM directly modulated laser (DML) and is class 1 laser compliant according to International Safety Standard IEC-60825. The receiver section uses an integrated InGaAs detector preamplifier (IDP) mounted in an optical header and a limiting post-amplifier IC.

ORDER INFORMATION

P/No.	Bit Rate (Mb/s)	SONET /SDH	Distance (km)	Spacing (GHz)	Wavelength (nm)	Package	Temp (°C)	RoHS Compliant
OPN-SFD41-80LC2	622	LR-2/L-4.2	80	100	DWDM*	LC SFP with DMI	0 to 70	Yes
OPN-SFD41-80LC2I	622	LR-2/L-4.2	80	100	DWDM*	LC SFP with DMI	-50 to 85	Yes

*: XX: 100GHz ITU Grid wavelength (Please see below)

Professional high-speed optical transceiver

Channel #	Product code	Frequency (THz)	Center Wavelength (nm)	Label
20	OPN-SFD20-80LC2 / OPN-SFD20-80LC2I	192.0	1561.42	D20
21	OPN-SFD21-80LC2 / OPN-SFD21-80LC2I	192.1	1560.61	D21
22	OPN-SFD22-80LC2 / OPN-SFD22-80LC2I	192.2	1559.79	D22
23	OPN-SFD23-80LC2 / OPN-SFD23-80LC2I	192.3	1558.98	D23
24	OPN-SFD24-80LC2 / OPN-SFD24-80LC2I	192.4	1558.17	D24
25	OPN-SFD25-80LC2 / OPN-SFD25-80LC2I	192.5	1557.36	D25
26	OPN-SFD26-80LC2 / OPN-SFD26-80LC2I	192.6	1556.55	D26
27	OPN-SFD27-80LC2 / OPN-SFD27-80LC2I	192.7	1555.75	D27
28	OPN-SFD28-80LC2 / OPN-SFD28-80LC2I	192.8	1554.94	D28
29	OPN-SFD29-80LC2 / OPN-SFD29-80LC2I	192.9	1554.13	D29
30	OPN-SFD30-80LC2 / OPN-SFD30-80LC2I	193.0	1553.33	D30
31	OPN-SFD31-80LC2 / OPN-SFD31-80LC2I	193.1	1552.52	D31
32	OPN-SFD32-80LC2 / OPN-SFD32-80LC2I	193.2	1551.72	D32
33	OPN-SFD33-80LC2 / OPN-SFD33-80LC2I	193.3	1550.92	D33
34	OPN-SFD34-80LC2 / OPN-SFD34-80LC2I	193.4	1550.12	D34
35	OPN-SFD35-80LC2 / OPN-SFD35-80LC2I	193.5	1549.32	D35
36	OPN-SFD36-80LC2 / OPN-SFD36-80LC2I	193.6	1548.51	D36
37	OPN-SFD37-80LC2 / OPN-SFD37-80LC2I	193.7	1547.72	D37
38	OPN-SFD38-80LC2 / OPN-SFD38-80LC2I	193.8	1546.92	D38
39	OPN-SFD39-80LC2 / OPN-SFD39-80LC2I	193.9	1546.12	D39
40	OPN-SFD40-80LC2 / OPN-SFD40-80LC2I	194.0	1545.32	D40
41	OPN-SFD41-80LC2 / OPN-SFD41-80LC2I	194.1	1544.53	D41
42	OPN-SFD42-80LC2 / OPN-SFD42-80LC2I	194.2	1543.73	D42
43	OPN-SFD43-80LC2 / OPN-SFD43-80LC2I	194.3	1542.94	D43
44	OPN-SFD44-80LC2 / OPN-SFD44-80LC2I	194.4	1542.14	D44
45	OPN-SFD45-80LC2 / OPN-SFD45-80LC2I	194.5	1541.35	D45
46	OPN-SFD46-80LC2 / OPN-SFD46-80LC2I	194.6	1540.56	D46
47	OPN-SFD47-80LC2 / OPN-SFD47-80LC2I	194.7	1539.77	D47
48	OPN-SFD48-80LC2 / OPN-SFD48-80LC2I	194.8	1538.98	D48
49	OPN-SFD49-80LC2 / OPN-SFD49-80LC2I	194.9	1538.19	D49
50	OPN-SFD50-80LC2 / OPN-SFD50-80LC2I	195.0	1537.40	D50
51	OPN-SFD51-80LC2 / OPN-SFD51-80LC2I	195.1	1536.61	D51
52	OPN-SFD52-80LC2 / OPN-SFD52-80LC2I	195.2	1535.82	D52
53	OPN-SFD53-80LC2 / OPN-SFD53-80LC2I	195.3	1535.04	D53
54	OPN-SFD54-80LC2 / OPN-SFD54-80LC2I	195.4	1534.25	D54
55	OPN-SFD55-80LC2 / OPN-SFD55-80LC2I	195.5	1533.47	D55
56	OPN-SFD56-80LC2 / OPN-SFD56-80LC2I	195.6	1532.68	D56
57	OPN-SFD57-80LC2 / OPN-SFD57-80LC2I	195.7	1531.90	D57
58	OPN-SFD58-80LC2 / OPN-SFD58-80LC2I	195.8	1531.12	D58
59	OPN-SFD59-80LC2 / OPN-SFD59-80LC2I	195.9	1530.33	D59
60	OPN-SFD60-80LC2 / OPN-SFD60-80LC2I	196.0	1529.55	D60

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Units	Notes
Storage Temperature	Tstg	-50	85	°C	
Relative Humidity	RH	5	85	%	Non-condensing
Operating Case Temperature	Topr	0	70	°C	OPN-SFD41-80LC2
		-50	85		OPN-SFD41-80LC2I
Power Supply Voltage	Vcc	-0.5	3.6	V	

Recommended Operating Conditions

Parameter	Symbol	Min	Typ	Max	Units / Notes
Power Supply Voltage	Vcc	3.13	3.3	3.47	V
Operating Case Temperature	Topr	0		70	°C / OPN-SFD41-80LC2
		-50		85	°C / OPN-SFD41-80LC2I
Relative Humidity	RH	5		85	% / Non-condensing
Power Supply Current	I _{CC} (TX+RX)			430	mA / OPN-SFD41-80LC2
				600	mA / OPN-SFD41-80LC2I
Data Rate			622		Mb/s

Professional high-speed optical transceiver

Transmitter Specifications (0°C < Topr < 70°C, 3.13V < Vcc < 3.47V)						
Parameter	Symbol	Min	Typ	Max	Units	Notes
Optical						
Average Launch Power	P _{o, AVG}	0	---	5	dBm	1
Center Wavelength Spacing			100		GHz	2
Transmitter Center Wavelength -- over life time	λ _c	X-100	X	X+100	pm	3
Output Spectrum Width	Δλ	---		1	nm	-20 dB width
Side Mode Suppression Ratio	SMSR	30			dB	
Extinction Ratio	E _R	10	---	---	dB	
Optical Rise Time	t _r			1.2	ns	10% to 90% Values
Optical Fall Time	t _f			1.2	ns	10% to 90% Values
Relative Intensity Noise	RIN			-120	dB/Hz	
Electrical						
Data Input Current -- Low	I _{IL}	-350			μA	
Data Input Current -- High	I _{IH}			350	μA	
Differential Input Voltage	V _{IH} - V _{IL}	0.5		2.4	V	Peak-to-Peak
TX Disable Input Voltage -- Low	T _{DIS, L}	0		0.5	V	4
TX Disable Input Voltage -- High	T _{DIS, H}	2.0		V _{cc}	V	4
TX Disable Assert Time	T _{ASSERT}			10	μs	
TX Disable Deassert Time	T _{DEASSERT}			1	ms	
TX Fault Output Voltage -- Low	T _{FaultL}	0		0.5	V	5
TX Fault Output Voltage -- High	T _{FaultH}	2.0		V _{cc} +0.3	V	5


1. Output power is power coupled into a 9/125 μm single-mode fiber.
2. Corresponds to approximately 0.8 nm.
3. X = specified ITU Grid wavelength
4. There is an internal 4.7K to 10K ohm pull-up resister to V_{cc}TX.
5. Open collector compatible, 4.7K to 10K ohm pull-up to V_{cc} (Host Supply Voltage).

Receiver Specifications (0°C < Topr < 70°C, 3.13V < Vcc < 3.47V)						
Parameter	Symbol	Min	Typ	Max	Units	Notes
Optical						
Sensitivity	Sens			-29	dBm	6
Maximum Input Power	P _{in}	-8			dBm	6
Signal Detect -- Asserted	P _A	---		-29	dBm	Transition: low to high
Signal Detect -- Deasserted	P _D	-40	---	---	dBm	Transition: high to low
Signal Detect -- Hysteresis		1.0	---		dB	
Wavelength of Operation		1100	---	1620	nm	
Electrical						
Differential Output Voltage	V _{OH} - V _{OL}	0.6		2.0	V	
Output LOS Voltage -- Low	V _{OL}	0		0.5	V	7
Output LOS Voltage -- High	V _{OH}	2.0		V _{cc} +0.3	V	7

1. Measured at PRBS 2²³-1 at BER 1E-10.
2. Open collector compatible, 4.7K to 10K ohm pull-up to V_{cc} (Host Supply Voltage)

Professional high-speed optical transceiver

CONNECTION DIAGRAM

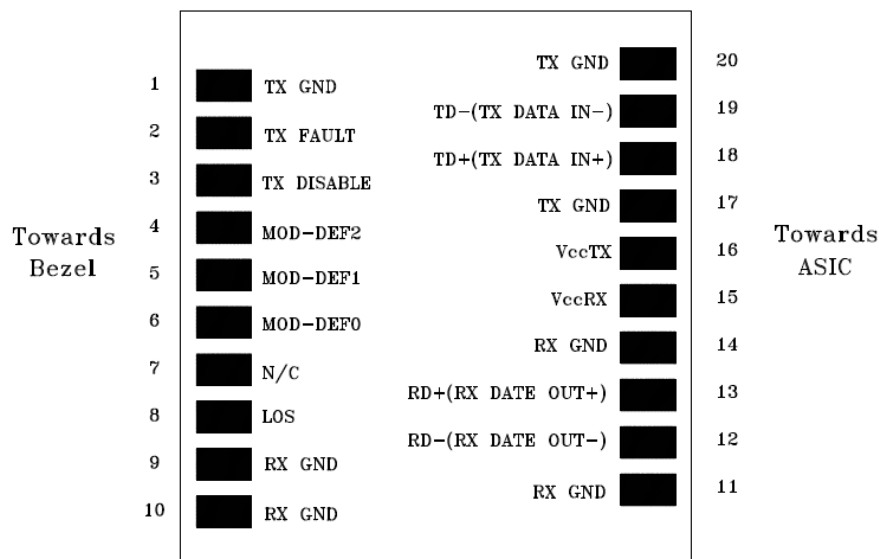

PIN	Signal Name	Description	PIN	Signal Name	Description
1	TX GND	Transmitter Ground	11	RX GND	Receiver Ground
2	TX Fault	Transmitter Fault Indication	12	RX DATA OUT-	Inverse Receiver Data Out
3	TX Disable	Transmitter Disable (Module disables on high or open)	13	RX DATA OUT+	Receiver Data Out
4	MOD-DFE2	Modulation Definition 2 – Two wires serial ID Interface	14	RX GND	Receiver Ground
5	MOD-DEF1	Modulation Definition 1 – Two wires serial ID Interface	15	Vcc RX	Receiver Power – 3.3V±5%
6	MOD-DEF0	Modulation Definition 0 – Ground in Module	16	Vcc TX	Transmitter Power – 3.3V±5%
7	N/C	Not Connected	17	TX GND	Transmitter Ground
8	LOS	Loss of Signal	18	TX DATA IN+	Transmitter Data In
9	RX GND	Receiver Ground	19	TX DATA IN-	Inverse Transmitter Data In
10	RX GND	Receiver Ground	20	TX GND	Transmitter Ground

MODULE DEFINITION

Module Definition	MOD-DEF2 PIN 4	MOD-DEF1 PIN 5	MOD-DEF0 PIN 6	Interpretation by Host
4	SDA	SCL	LV-TTL Low	Serial module definition protocol


Module Definition 4 specifies a serial definition protocol. For this definition, upon power up, SDA and SCL appear as no connection (NC) and MOD-ABS is TTL LOW. When the host system detects this condition, it activates the serial protocol. The protocol uses the 2-wire serial CMOS E²PROM protocol of the ATMEL AT24C01A/02/04 family of components.

RECOMMENDED CIRCUIT SCHEMATIC




Units in mm

Top View

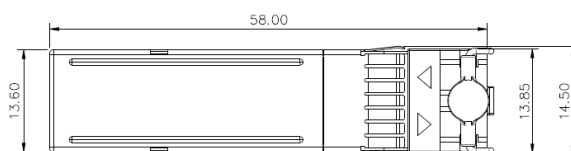


Front View

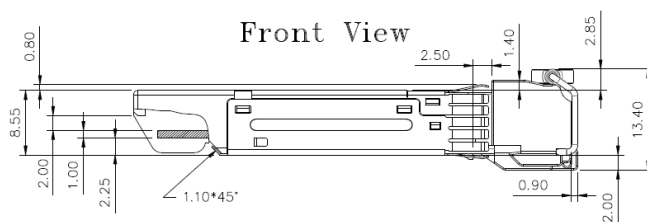

Bottom View

LATCH COLOR
White



Side View

Optowan Technology Co., Ltd www.optowan.ru OPN-SFD41-80LC2I