

Professional high-speed optical transceiver

## OPN-SL151-120LC2 / OPN-SL151-120LC2I

3.3V / CWDM / 155 Mbps Digital Diagnostic LC SFP SINGLE-MODE TRANSCEIVER

### PRODUCT FEATURES

- Hot-Pluggable SFP Footprint LC Optical Transceiver
- Small Form-Factor Pluggable (SFP) MSA compatible
  - Compliant with SONET OC-3 LR / SDH STM-1
  - SFF-8472 Digital Diagnostic Function
- 18 Wavelength ( $\lambda$ ): 1270 nm to 1610 nm CWDM DFBLD Transmitter
  - 34 dB Power Budget at Least
  - AC/AC Coupling according to MSA
  - Single +3.3 V Power Supply
    - RoHS Compliant
  - 0 to 70°C Operation: OPN-SL151-120LC2
  - -50 to 85°C Operation: OPN-SL151-120LC2I
- Class 1 Laser International Safety Standard IEC-60825Compliant

### APPLICATIONS

- ATM Switches and Routers
- SONET / SDH Switch Infrastructure
  - Fast Ethernet Applications

### PRODUCT DESCRIPTION

The OPN-SL151-120LC2 series single mode transceivers is small form factor pluggable module for bi-directional serial optical data communications such as SONET OC-3 / SDH STM-1 and Fast Ethernet. It is with the SFP 20-pinconnector to allow hot plug capability. Digital diagnosticfunctions are available via an I<sup>2</sup>C. This module is designed for single mode fiber and operates at a nominal wavelength of CWDM. There are eighteen center wavelengths available from 1270 nm to 1610 nm, with each step 20 nm. A guaranteed minimum optical link budget of 34 dB is offered The transmitter section uses a multiple quantum well CWDM DFB laser and is a class 1 laser compliant according to International Safety Standard IEC-60825. The receiver section uses an integrated InGaAs detector preamplifier (IDP) mounted in an optical header and a limiting post-amplifier IC.

### ORDER INFORMATION

| P/No.             | Bit Rate (Mb/s) | SONET /SDH | Power Budget (dB) | Wavelength (nm) | Package         | Temp. (°C) | TX Power (dBm) | RX Sens. (dBm) | RoHS Compliant |
|-------------------|-----------------|------------|-------------------|-----------------|-----------------|------------|----------------|----------------|----------------|
| OPN-SL151-120LC2  | 125 / 155       |            | > 34              | CWDM*           | LC SFP with DMI | 0 to 70    | 5 to 0         | -34            | Yes            |
| OPN-SL151-120LC2I | 125 / 155       |            | > 34              | CWDM*           | LC SFP with DMI | -50 to 85  | 5 to 0         | -34            | Yes            |

CWDM\* Wavelength (0 to 70°C)

| Central Wavelength | Min. (nm) | Typ. (nm) | Max. (nm) | Clasp Color Code | Central Wavelength | Min. (nm) | Typ. (nm) | Max. (nm) | Clasp Color Code |
|--------------------|-----------|-----------|-----------|------------------|--------------------|-----------|-----------|-----------|------------------|
| 127                | 1264.5    | 1270      | 1277.5    | Light Purple     | 145                | 1444.5    | 1450      | 1457.5    | Yellow Orange    |
| 129                | 1284.5    | 1290      | 1297.5    | Sky Blue         | 147                | 1464.5    | 1470      | 1477.5    | Gray             |
| 131                | 1304.5    | 1310      | 1317.5    | Yellow Green     | 149                | 1484.5    | 1490      | 1497.5    | Violet           |
| 133                | 1324.5    | 1330      | 1337.5    | Yellow Ocher     | 151                | 1504.5    | 1510      | 1517.5    | Blue             |
| 135                | 1344.5    | 1350      | 1357.5    | Pink             | 153                | 1524.5    | 1530      | 1537.5    | Green            |
| 137                | 1364.5    | 1370      | 1377.5    | Beige            | 155                | 1544.5    | 1550      | 1557.5    | Yellow           |
| 139                | 1384.5    | 1390      | 1397.5    | White            | 157                | 1564.5    | 1570      | 1577.5    | Orange           |
| 141                | 1404.5    | 1410      | 1417.5    | Silver           | 159                | 1584.5    | 1590      | 1597.5    | Red              |
| 143                | 1424.5    | 1430      | 1437.5    | Black            | 161                | 1604.5    | 1610      | 1617.5    | Brown            |

CWDM\*: 18 Wavelengths from 1270 nm to 1610 nm, each step 20 nm.

## Professional high-speed optical transceiver

| Absolute Maximum Ratings   |        |      |     |       |                                       |
|----------------------------|--------|------|-----|-------|---------------------------------------|
| Parameter                  | Symbol | Min  | Max | Units | Notes                                 |
| Storage Temperature        | Tstg   | -50  | 85  | °C    |                                       |
| Operating Case Temperature | Topr   | 0    | 70  | °C    | OPN-SL151-120LC2<br>OPN-SL151-120LC2I |
| Power Supply Voltage       | Vcc    | -0.5 | 3.6 | V     |                                       |

| Recommended Operating Conditions |                         |      |     |      |                        |
|----------------------------------|-------------------------|------|-----|------|------------------------|
| Parameter                        | Symbol                  | Min  | Typ | Max  | Units / Notes          |
| Power Supply Voltage             | Vcc                     | 3.13 | 3.3 | 3.47 | V                      |
| Operating Case Temperature       | Topr                    | 0    |     | 70   | °C / OPN-SL151-120LC2  |
| Power Supply Current             | I <sub>CC</sub> (TX+RX) |      | 200 | 300  | mA / OPN-SL151-120LC2  |
|                                  |                         |      |     | 600  | mA / OPN-SL151-120LC2I |
| Data Rate                        |                         |      | 155 | 200  | Mb/s                   |

| Transmitter Specifications (0°C < Topr < 70°C, 3.13V < Vcc < 3.47V) |                                                                    |                      |                |                      |       |              |
|---------------------------------------------------------------------|--------------------------------------------------------------------|----------------------|----------------|----------------------|-------|--------------|
| Parameter                                                           | Symbol                                                             | Min                  | Typ            | Max                  | Units | Notes        |
| <b>Optical</b>                                                      |                                                                    |                      |                |                      |       |              |
| Optical Transmit Power                                              | P <sub>o</sub>                                                     | 0                    | ---            | 5                    | dBm   | 1            |
| Output Center Wavelength                                            | λ                                                                  | λ <sub>c</sub> - 5.5 | λ <sub>c</sub> | λ <sub>c</sub> + 7.5 | nm    | 2            |
| Output Spectrum Width                                               | Δλ                                                                 | ---                  | ---            | 1                    | nm    | -20 dB Width |
| Extinction Ratio                                                    | E <sub>R</sub>                                                     | 10                   | ---            | ---                  | dB    |              |
| Output Eye                                                          | Compliant with Bellcore TR-NWT-000253 and ITU recommendation G.957 |                      |                |                      |       |              |
| Optical Rise Time                                                   | t <sub>r</sub>                                                     |                      |                | 1.5                  | ns    | 3            |
| Optical Fall Time                                                   | t <sub>f</sub>                                                     |                      |                | 1.5                  | ns    | 3            |
| Relative Intensity Noise                                            | RIN                                                                |                      |                | -120                 | dB/Hz |              |
| <b>Electrical</b>                                                   |                                                                    |                      |                |                      |       |              |
| Data Input Current – Low                                            | I <sub>IL</sub>                                                    | -350                 |                |                      | μA    |              |
| Data Input Current – High                                           | I <sub>IH</sub>                                                    |                      |                | 350                  | μA    |              |
| Differential Input Voltage                                          | V <sub>IH</sub> - V <sub>IL</sub>                                  | 0.5                  |                | 2.4                  | V     | Peak-to-Peak |
| TX Disable Input Voltage – Low                                      | T <sub>DIS, L</sub>                                                | 0                    |                | 0.5                  | V     | 4            |
| TX Disable Input Voltage – High                                     | T <sub>DIS, H</sub>                                                | 2.0                  |                | V <sub>cc</sub>      | V     | 4            |
| TX Disable Assert Time                                              | T <sub>ASSERT</sub>                                                |                      |                | 10                   | μs    |              |
| TX Disable Deassert Time                                            | T <sub>DEASSERT</sub>                                              |                      |                | 1                    | ms    |              |
| TX Fault Output Voltage -- Low                                      | T <sub>FaultL</sub>                                                | 0                    |                | 0.5                  | V     | 5            |
| TX Fault Output Voltage -- High                                     | T <sub>FaultH</sub>                                                | 2.0                  |                | V <sub>cc</sub> +0.3 | V     | 5            |

1. Output power is power coupled into a 9/125 μm single mode fiber.
2. ITU-T G.694.2 CWDM wavelength from 1270 nm to 1610 nm, each step 20 nm.
3. 10 % to 90% Values.
4. There is an internal 4.7K to 10K ohm pull-up resistor to VccTX.
5. Open collector compatible, 4.7K to 10K ohm pull-up to Vcc (Host Supply Voltage).


| Receiver Specifications (0°C < Topr < 70°C, 3.13V < Vcc < 3.47V) |        |     |     |     |       |                         |
|------------------------------------------------------------------|--------|-----|-----|-----|-------|-------------------------|
| Parameter                                                        | Symbol | Min | Typ | Max | Units | Notes                   |
| <b>Optical</b>                                                   |        |     |     |     |       |                         |
| Sensitivity                                                      | Sens   |     |     | -34 | dBm   | 1                       |
| Maximum Input Power                                              | Pin    | -8  |     |     | dBm   | 1                       |
| Signal Detect -- Asserted                                        | Pa     | --- |     | -34 | dBm   | Transition: low to high |
| Signal Detect -- Deasserted                                      | Pd     | -47 | --- | --- | dBm   | Transition: high to low |

## Professional high-speed optical transceiver

|                             |                   |      |     |              |    |   |
|-----------------------------|-------------------|------|-----|--------------|----|---|
| Signal detect -- Hysteresis |                   | 1.0  | --- |              | dB |   |
| Wavelength of Operation     |                   | 1100 | --- | 1620         | nm |   |
| <b>Electrical</b>           |                   |      |     |              |    |   |
| Differential Output Voltage | $V_{OH} - V_{OL}$ | 0.6  |     | 2.0          | V  |   |
| Output LOS Voltage -- Low   | $V_{OL}$          | 0    |     | 0.5          | V  | 2 |
| Output LOS Voltage -- High  | $V_{OH}$          | 2.0  |     | $V_{CC}+0.3$ | V  | 2 |

1. Measured at  $2^{23}$ -1 PRBS at BER 1E-10.
2. Open collector compatible, 4.7K to 10K ohm pull-up to Vcc (Host Supply Voltage).

## CONNECTION DIAGRAM

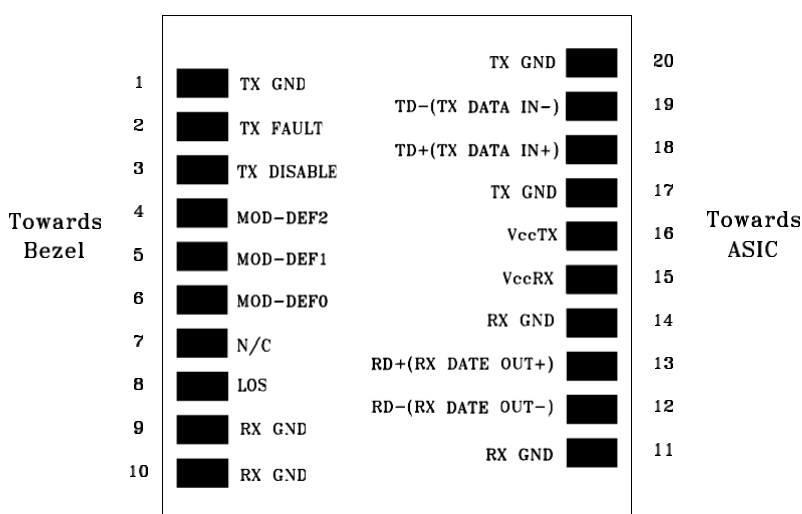

| PIN | Signal Name | Description                                             | PIN | Signal Name  | Description                 |
|-----|-------------|---------------------------------------------------------|-----|--------------|-----------------------------|
| 1   | TX GND      | Transmitter Ground                                      | 11  | RX GND       | Receiver Ground             |
| 2   | TX Fault    | Transmitter Fault Indication                            | 12  | RX DATA OUT- | Inverse Receiver Data Out   |
| 3   | TX Disable  | Transmitter Disable (Module disables on high or open)   | 13  | RX DATA OUT+ | Receiver Data Out           |
| 4   | MOD-DFE2    | Modulation Definition 2 – Two wires serial ID Interface | 14  | RX GND       | Receiver Ground             |
| 5   | MOD-DEF1    | Modulation Definition 1 – Two wires serial ID Interface | 15  | Vcc RX       | Receiver Power – 3.3V±5%    |
| 6   | MOD-DEF0    | Modulation Definition 0 – Ground in Module              | 16  | Vcc TX       | Transmitter Power – 3.3V±5% |
| 7   | N/C         | Not Connected                                           | 17  | TX GND       | Transmitter Ground          |
| 8   | LOS         | Loss of Signal                                          | 18  | TX DATA IN+  | Transmitter Data In         |
| 9   | RX GND      | Receiver Ground                                         | 19  | TX DATA IN-  | Inverse Transmitter Data In |
| 10  | RX GND      | Receiver Ground                                         | 20  | TX GND       | Transmitter Ground          |

## Module Definition


| Module Definition | MOD-DEF2<br>PIN 4 | MOD-DEF1<br>PIN 5 | MOD-DEF0<br>PIN 6 | Interpretation by Host            |
|-------------------|-------------------|-------------------|-------------------|-----------------------------------|
| 4                 | SDA               | SCL               | LV-TTL Low        | Serial module definition protocol |

Module Definition 4 specifies a serial definition protocol. For this definition, upon power up, MOD-DEF(1:2) appear as no connector (NC) and MOD-DEF(0) is TTL LOW. When the host system detects this condition, it activates the serial protocol. The protocol uses the 2-wire serial CMOS E<sup>2</sup>PROM protocol of the ATMEL AT24C01A/02/04 family of components.

Optowan Technology Co., Ltd [www.optowan.ru](http://www.optowan.ru) OPN-SL151-120LC2

## Professional high-speed optical transceiver

2)

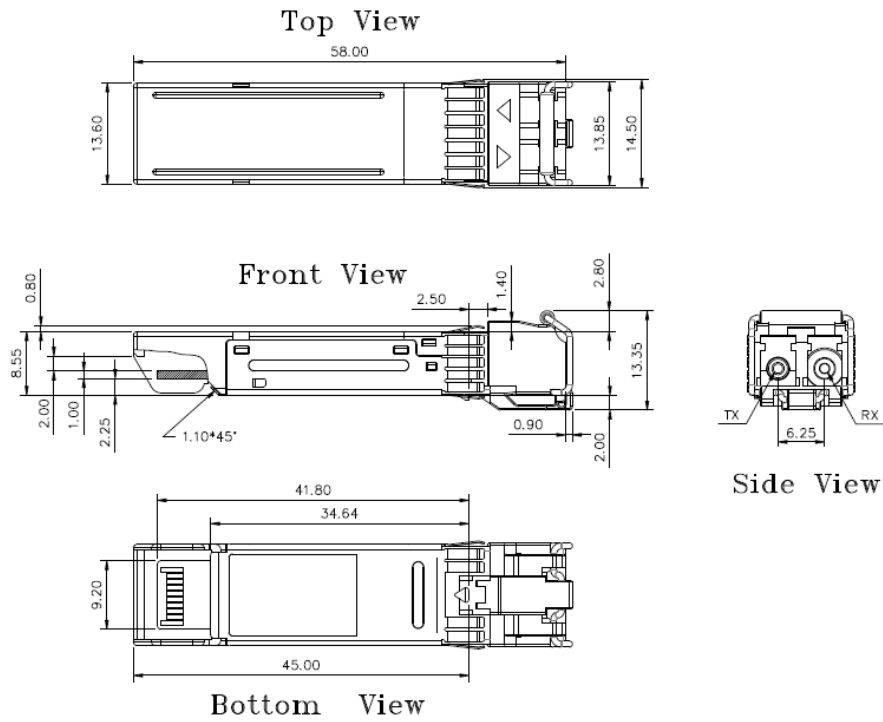

### OPN-SL151-120LC2I

Note: Specifications subject to change without notice.