

Professional high-speed optical transceiver

OPN-SLD40-160LC2 / OPN-SLD40-160LC2I

155Mbps / 160km / 100GHz DWDM Digital Diagnostic LC SFP SINGLE-MODE TRANSCEIVER

PRODUCT FEATURES

- Hot-Pluggable SFP Footprint LC Optical Transceiver
- Small Form-Factor Pluggable (SFP) MSA compatible
 - Compliant with SONET OC-3 / SDH STM-1
 - Distance up to 160km
- Temperature-stabilized DWDM DML Transmitter
 - 37 dB Power Budget at Least
 - 100 GHz ITU Grid, C Band
- SFF-8472 Digital Diagnostic Function
- AC/AC Coupling according to MSA
 - Single +3.3 V Power Supply
 - RoHS Compliant
- 0 to 70°C Operation: OPN-SLD40-160LC2
- -50 to 85°C Operation : OPN-SLD40-160LC2I
- Class 1 Laser International Safety Standard IEC-60825Compliant

APPLICATIONS

- ATM Switches and Routers
- SONET / SDH Switch Infrastructure
 - Fast Ethernet Applications

PRODUCT DESCRIPTION

The OPN-SLD40-160LC2I series single mode transceiver is a small form factor pluggable module for bi-directional serial optical data communications such as SONET OC-3 /SDH STM-1 and Fast Ethernet. It is with the SFP 20-pin connector to allow hot plug capability. Digital diagnostic functions are available via an I²C. This module is designed for single mode fiber and operates at a nominal wavelength of 100GHz ITU Grid, C Band DWDM wavelength. A guaranteed minimum optical link budget of 37 dB is offered. The transmitter section uses temperature-stabilized DWDM directly modulated laser (DML) and is class 1 laser compliant according to International Safety Standard IEC-60825. The receiver section uses an integrated InGaAs detector preamplifier (IDP) mounted in an optical header and a limiting post-amplifier IC.

ORDER INFORMATION

P/No.	Bit Rate (Mb/s)	SONET /SDH	Distance (km)	Spacing (GHz)	Wavelength (nm)	Package	Temp (°C)	RoHS Compliant
OPN-SLD40-160LC2	125 / 155		160	100	DWDM*	LC SFP with DMI	0 to 70	Yes
OPN-SLD40-160LC2I	125 / 155		160	100	DWDM*	LC SFP with DMI	-50 to 85	Yes

*: XX: 100GHz ITU Grid wavelength (Please see below)

Channel #	Product code	Frequency (THz)	Center Wavelength (nm)	Label
20	OPN-SLD40-160LC2I	192.0	1561.42	D20
21	OPN-SLD21-160LC2I	192.1	1560.61	D21
22	OPN-SLD22-160LC2I	192.2	1559.79	D22
23	OPN-SLD23-160LC2I	192.3	1558.98	D23
24	OPN-SLD24-160LC2I	192.4	1558.17	D24
25	OPN-SLD25-160LC2I	192.5	1557.36	D25
26	OPN-SLD26-160LC2I	192.6	1556.55	D26
27	OPN-SLD27-160LC2I	192.7	1555.75	D27
28	OPN-SLD28-160LC2I	192.8	1554.94	D28
29	OPN-SLD29-160LC2I	192.9	1554.13	D29
30	OPN-SLD30-160LC2I	193.0	1553.33	D30
31	OPN-SLD31-160LC2I	193.1	1552.52	D31
32	OPN-SLD32-160LC2I	193.2	1551.72	D32
33	OPN-SLD33-160LC2I	193.3	1550.92	D33
34	OPN-SLD34-160LC2I	193.4	1550.12	D34

Professional high-speed optical transceiver

35	OPN-SLD35-160LC2I	193.5	1549.32	D35
36	OPN-SLD36-160LC2I	193.6	1548.51	D36
37	OPN-SLD37-160LC2I	193.7	1547.72	D37
38	OPN-SLD38-160LC2I	193.8	1546.92	D38
39	OPN-SLD39-160LC2I	193.9	1546.12	D39
40	OPN-SLD40-160LC2I	194.0	1545.32	D40
41	OPN-SLD41-160LC2I	194.1	1544.53	D41
42	OPN-SLD42-160LC2I	194.2	1543.73	D42
43	OPN-SLD43-160LC2I	194.3	1542.94	D43
44	OPN-SLD44-160LC2I	194.4	1542.14	D44
45	OPN-SLD45-160LC2I	194.5	1541.35	D45
46	OPN-SLD46-160LC2I	194.6	1540.56	D46
47	OPN-SLD47-160LC2I	194.7	1539.77	D47
48	OPN-SLD48-160LC2I	194.8	1538.98	D48
49	OPN-SLD49-160LC2I	194.9	1538.19	D49
50	OPN-SLD50-160LC2I	195.0	1537.40	D50
51	OPN-SLD51-160LC2I	195.1	1536.61	D51
52	OPN-SLD52-160LC2I	195.2	1535.82	D52
53	OPN-SLD53-160LC2I	195.3	1535.04	D53
54	OPN-SLD54-160LC2I	195.4	1534.25	D54
55	OPN-SLD55-160LC2I	195.5	1533.47	D55
56	OPN-SLD56-160LC2I	195.6	1532.68	D56
57	OPN-SLD57-160LC2I	195.7	1531.90	D57
58	OPN-SLD58-160LC2I	195.8	1531.12	D58
59	OPN-SLD59-160LC2I	195.9	1530.33	D59
60	OPN-SLD60-160LC2I	196.0	1529.55	D60

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Units	Notes
Storage Temperature	T _{stg}	-50	85	°C	
Relative Humidity	RH	5	85	%	Non-condensing
Operating Case Temperature	T _{opr}	0	70	°C	OPN-SLD40-160LC2
		-50	85		OPN-SLD40-160LC2I
Power Supply Voltage	V _{cc}	-0.5	3.6	V	

Recommended Operating Conditions

Parameter	Symbol	Min	Typ	Max	Units / Notes
Power Supply Voltage	V _{cc}	3.13	3.3	3.47	V
Operating Case Temperature	T _{opr}	0		70	°C / OPN-SLD40-160LC2
		-50		85	°C / OPN-SLD40-160LC2I
Relative Humidity	RH	5		85	% / Non-condensing
Power Supply Current	I _{CC(TX+RX)}			430	mA / OPN-SLD40-160LC2
				600	mA / OPN-SLD40-160LC2I
Data Rate			125/155	200	Mb/s

Transmitter Specifications (0°C < T_{opr} < 70°C, 3.13V < V_{cc} < 3.47V)

Parameter	Symbol	Min	Typ	Max	Units	Notes
Optical						
Average Launch Power	P _{o, AVG}	+2	---	+5	dBm	1
Center Wavelength Spacing			100		GHz	2
Transmitter Center Wavelength -- over life time	λ _c	X-100	X	X+100	pm	3
Output Spectrum Width	Δλ	---		1	nm	-20 dB width
Side Mode Suppression Ratio	SMSR	30			dB	
Extinction Ratio	E _R	10	---	---	dB	
Optical Rise Time	t _r			2	ns	10% to 90% Values
Optical Fall Time	t _f			2	ns	10% to 90% Values
Relative Intensity Noise	RIN			-120	dB/Hz	

Professional high-speed optical transceiver


Electrical						
Data Input Current -- Low	I_{IL}	-350			μA	
Data Input Current -- High	I_{IH}			350	μA	
Differential Input Voltage	$V_{IH} - V_{IL}$	0.5		2.4	V	Peak-to-Peak
TX Disable Input Voltage -- Low	$T_{DIS, L}$	0		0.5	V	4
TX Disable Input Voltage -- High	$T_{DIS, H}$	2.0		Vcc	V	4
TX Disable Assert Time	T_{ASSERT}			10	μs	
TX Disable Deassert Time	$T_{DEASSERT}$			1	ms	
TX Fault Output Voltage -- Low	T_{FaultL}	0		0.8	V	5
TX Fault Output Voltage -- High	T_{FaultH}	2.0		Vcc+0.3	V	5

1. Output power is power coupled into a 9/125 μm single-mode fiber.
2. Corresponds to approximately 0.8 nm.
3. X = specified ITU Grid wavelength
4. There is an internal 4.7K to 10K ohm pull-up resistor to VccTX.
5. Open collector compatible, 4.7K to 10K ohm pull-up to Vcc (Host Supply Voltage).

Receiver Specifications (0°C < Topr < 70°C, 3.13V < Vcc < 3.47V)						
Parameter	Symbol	Min	Typ	Max	Units	Notes
Optical						
Sensitivity	Sens			-35	dBm	6
Maximum Input Power	P_{in}	-10			dBm	6
Signal Detect -- Asserted	P_A	---		-35	dBm	Transition: low to high
Signal Detect -- Deasserted	P_D	-47	---	---	dBm	Transition: high to low
Signal Detect – Hysteresis		1.0	---		dB	
Wavelength of Operation		1100	---	1620	nm	
Electrical						
Differential Output Voltage	$V_{OH} - V_{OL}$	0.6		2.0	V	
Output LOS Voltage -- Low	V_{OL}	0		0.8	V	7
Output LOS Voltage -- High	V_{OH}	2.0		Vcc+0.3	V	7

6. Measured at PRBS 2²³-1 at BER 1E-10.
7. Open collector compatible, 4.7K to 10K ohm pull-up to Vcc (Host Supply Voltage)

CONNECTION DIAGRAM

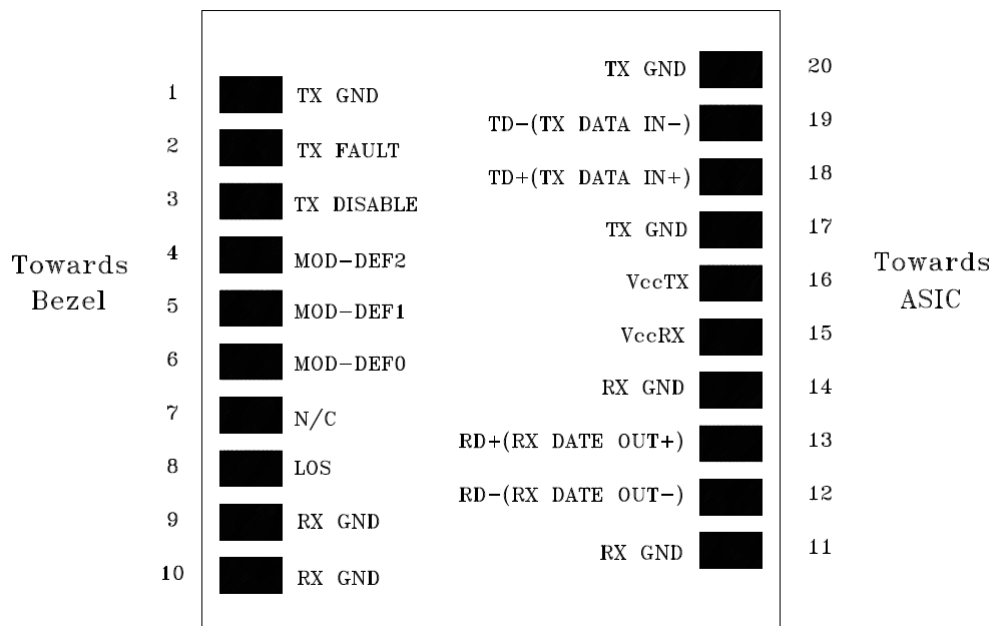

Professional high-speed optical transceiver


PIN	Signal Name	Description	PIN	Signal Name	Description
1	TX GND	Transmitter Ground	11	RX GND	Receiver Ground
2	TX Fault	Transmitter Fault Indication	12	RX DATA OUT-	Inverse Receiver Data Out
3	TX Disable	Transmitter Disable (Module disables on high or open)	13	RX DATA OUT+	Receiver Data Out
4	MOD-DFE2	Modulation Definition 2 – Two wires serial ID Interface	14	RX GND	Receiver Ground
5	MOD-DEF1	Modulation Definition 1 – Two wires serial ID Interface	15	Vcc RX	Receiver Power – 3.3V±5%
6	MOD-DEF0	Modulation Definition 0 – Ground in Module	16	Vcc TX	Transmitter Power – 3.3V±5%
7	N/C	Not Connected	17	TX GND	Transmitter Ground
8	LOS	Loss of Signal	18	TX DATA IN+	Transmitter Data In
9	RX GND	Receiver Ground	19	TX DATA IN-	Inverse Transmitter Data In
10	RX GND	Receiver Ground	20	TX GND	Transmitter Ground

MODULE DEFINITION

Module Definition	MOD-DEF2 PIN 4	MOD-DEF1 PIN 5	MOD-DEF0 PIN 6	Interpretation by Host
4	SDA	SCL	LV-TTL Low	Serial module definition protocol

Module Definition 4 specifies a serial definition protocol. For this definition, upon power up, SDA and SCL appear as no connection (NC) and MOD-ABS is TTL LOW. When the host system detects this condition, it activates the serial protocol. The protocol uses the 2-wire serial CMOS E²PROM protocol of the ATMEL AT24C01A/02/04 family of components.


RECOMMENDED CIRCUIT SCHEMATIC

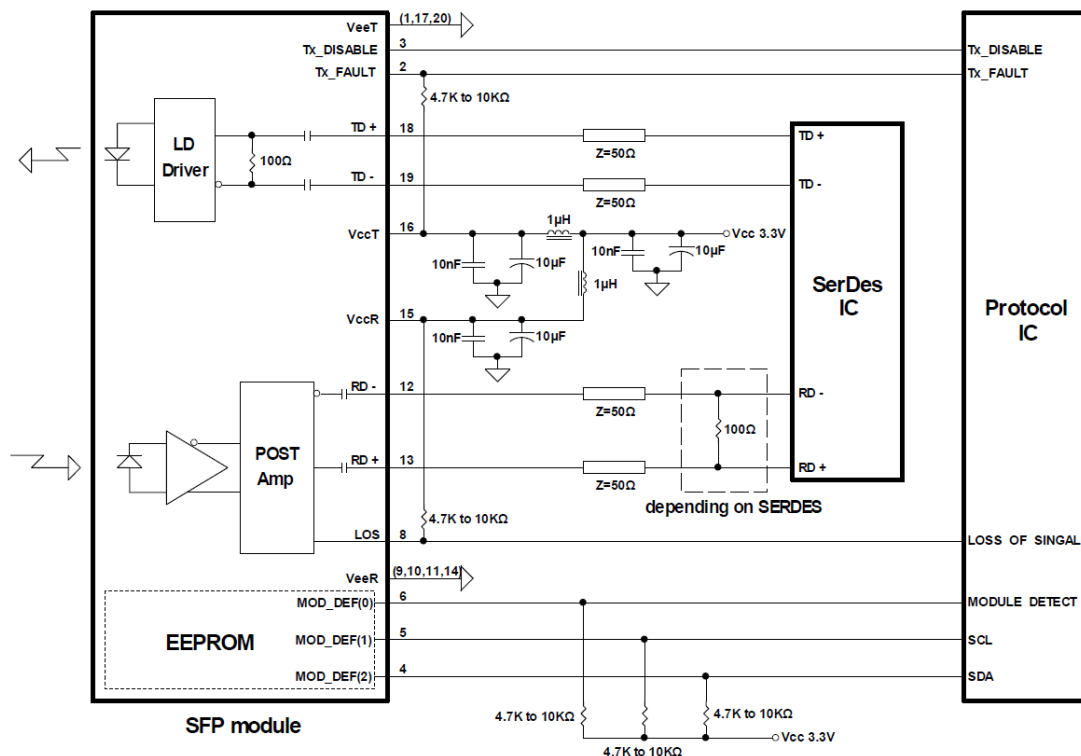

Professional high-speed optical transceiver

PACKAGE DIAGRAM

Units in mm

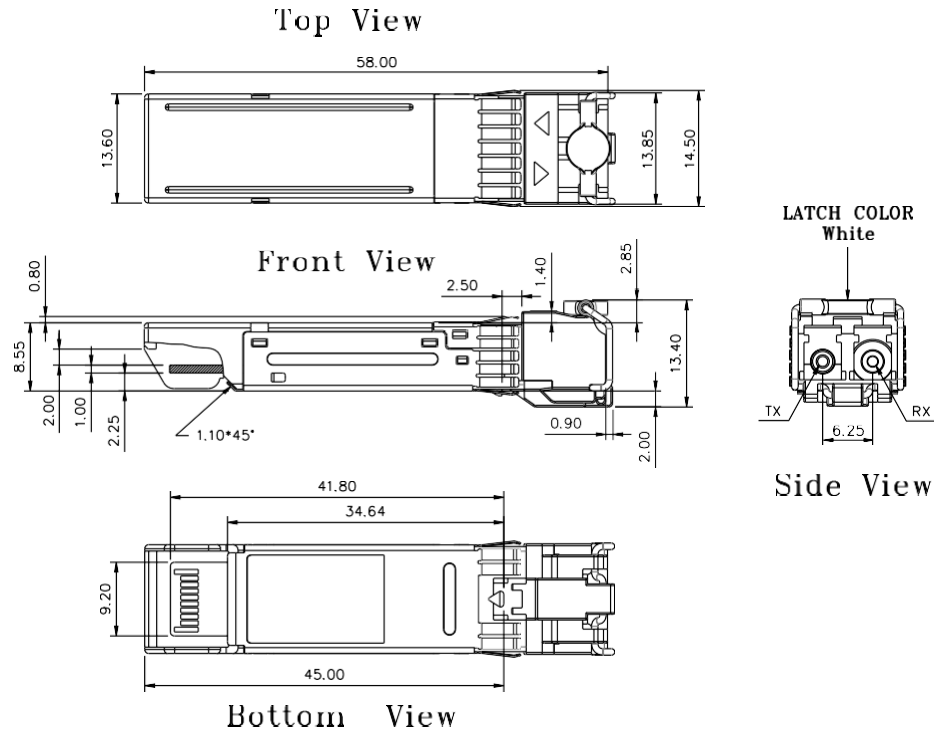

Note: Specifications subject to change without notice.